




The System of Model Numbers for Split Models

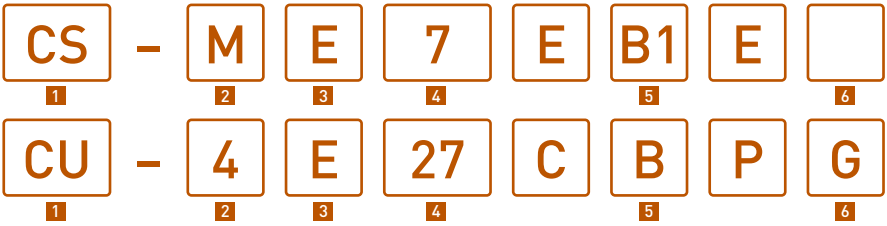

1 Model Type	2 Connection Configuration / Classification	3 Function
CS : Split Type (Indoor unit) CU : Split Type (Outdoor unit) CZ : Accessories	<Indoor unit> M : Multi Split Type H : Single Split /Super Deluxe N : Single Split /Deluxe(Nordic Model) <Outdoor unit> n: (n) rooms Multi	E : Inverter Heat Pump W : Heat Pump V : Cooling Only
4 Capacity	5 Type	6 Other
Value = Capacity (Btu/h) x 1/1000 e.g. 18,000 Btu/h x 1/1000 = 18	K : Wall-Mounted Type F : Floor Console Type T : Floor or Ceiling Dual Mountable Type B1,B4 : Cassette Type D3 : Hide-Away Type B : Flexibly connectable to various type of indoor unit	G : Outdoor power supply for Multi Split Type <Indoor unit> W : For either single or multi use S : For single use

Optional Accessories

Filters

Replacement SUPER alleru-buster filter

CZ-SA13P,CZ-SA14P	Applicable Models	
	CZ-SA13P	CZ-SA14P
	Wall-Mounted (Deluxe, Deluxe Wide), Cassette (4-way) CS-NE7GKE, CS-NE9GKE, CS-NE12GKE, CS-E15EKEA, CS-E18EKEA, CS-E21EKEA, CS-V7DKE, CS-V9DKE, CS-V12DKE, CS-V18DKE, CS-V24DKE, CS-V28EKE CS-E15DB4EW, CS-E18DB4EW, CS-E21DB4ES	Wall-Mounted (Super Deluxe, Deluxe Slim), Floor or Ceiling CS-HE9GKE, CS-HE12GKE, CS-TE9DKE, CS-TE12DKE, CS-E15DTEW, CS-E18DTEW, CS-E21DTEW, CS-ME10DTEG

Replacement: every 3 years

Pipe Size Reducer

CZ-MA1P	Applicable Models
	CZ-MA1P
	CS-CE12GKEW, CS-E15GKEW, CS-E18GKEW, CS-E15DTEW, CS-E18DTEW, CS-E15DB4EW, CS-E18DB4EW, CS-E15DD3EW, CS-E18DD3EW

ISO 9000 Series Certification	Environmental Management Systems Approval Certificate
 SIRIM CERTIFIED TO MS ISO 9001: 2000 Panasonic HA Air-Conditioning (M) Sdn. Bhd. (PHAAM) Registration No.: AR 1010 CERTIFIED TO DIN EN ISO 9001: 1994 MATSUSHITA ELECTRIC INDUSTRIAL CO., LTD. AIR-CONDITIONER DIVISION Certificate Registration No.09 100 5766	 UKAS ENVIRONMENTAL MANAGEMENT 074 CERTIFIED TO MS ISO 14001: 2004 Panasonic HA Air-Conditioning (M) Sdn. Bhd. (PHAAM) Certification No.: P06860001 UKAS ENVIRONMENTAL MANAGEMENT 001 CERTIFIED TO ISO 14001: 1996 MATSUSHITA ELECTRIC INDUSTRIAL CO., LTD. AIR-CONDITIONER DIVISION Approval Certificate No.: 771754

The Matsushita Group actively develops environmentally-conscious products.

Energy

Our energy-conservation technologies help to minimise energy consumption and prevent global warming.

Materials

None of the products we ship contain any specified chemical substances* regardless of market.

* Lead, cadmium, hexavalent chromium, mercury, specified bromine flame retardants (PBB, PBDE)

Factories

Our manufacturing sites around the world have acquired ISO 14001 certification.

- Please read the Installation Manual carefully before installing the unit, and read the Operating Manual before using.
- Specifications are subject to change without notice for further improvement.
- The contents of this catalogue are effective as of July, 2007.
- Due to printing considerations, the actual colours may vary slightly from these shown.



Powerful, Comfortable Heating Even in the Coldest Months!

Reliable, High-Performance Heatpumps Designed for Nordic Lifestyles

Boasting exceptional heating performance,
Panasonic heatpumps are ready to deliver the power you need for all-day comfort even during the harsh Nordic winter.
Top-class, high-efficiency operation also means amazing energy savings even when heating for a long time.
All this and more from heatpumps designed with Nordic lifestyles in mind.



Reliable Heating Even in the Middle of Winter

Heating Possible at -20°C*

Providing outstanding cold climate performance, Panasonic heatpumps let you enjoy stable heating even when the outside temperature is below freezing.

Heating Possible
-20°C*

Keeps the Temperature Above Freezing


+8°C/+10°C Low-Temperature Heating

During the severe winter period, you can set the unit to provide low-temperature heating to prevent freezing. Minimizing the heating energy required to protect your property, this is an ideal feature for temperature control in your summer house, garage and basement.

Economical, Environment-Friendly Operation


High COP (Coefficient of performance)

Original Panasonic inverter technology and a high-performance compressor provide top-class operating efficiency. This lets you enjoy lower electricity bills while contributing to environmental protection.



Designed for Nordic Lifestyles

Based on 30 years of experience in the Nordic market, Panasonic has implemented various technologies and countermeasures to meet the needs of Nordic lifestyles.



Crankcase Heater
Prevents the compressor freezing.



Sound-proof Material
The compressor is thoroughly protected to prevent annoying noises.



Freezing Resistance and Field Tests
Field tests are conducted under actual conditions of use in the middle of winter.

* Operating temperature limit is -20°C with performance data guaranteed down to -15°C.



Model Line-Up Choose the Best Inverter



All models use a new R410A refrigerant.

Energy-Efficiency Classification
Most efficient level : A

HEATING A 3.60 < COP


COOLING A 3.20 < EER

Refer to page 23 for information on Energy-Efficiency Classification.

Single Inverter Split					
Wall-Mounted			Wall-Mounted		
Indoor	Super Deluxe p.14	Deluxe p.14		Deluxe p.14	Deluxe p.15
Heating Capacity (kW)	2.5				
	3.5	CS-HE9GKE (CU-HE9GKE) A	CS-NE7GKE (CU-NE7GKE) A	CS-CE7GKEW (CU-CE7GKE) A	
	5.0	CS-HE12GKE (CU-HE12GKE) A	CS-NE9GKE (CU-NE9GKE) A	CS-CE9GKEW (CU-CE9GKE) A	CS-TE9DKE (CU-TE9DKE) A
			CS-NE12GKE (CU-NE12GKE) A	CS-CE12GKEW (CU-CE12GKE) A	CS-TE12DKE (CU-TE12DKE) A
	6.5				CS-E15EKEA (CU-E15EKEA)
	7.0				CS-E18EKEA (CU-E18EKEA) A
	8.5				CS-E21EKEA (CU-E21EKEA)
	9.5				
Exclusive Features					

Single Inverter Split			
	Floor or Ceiling	Cassette (4-way)	Hide-Away
Indoor	 p.16	 p.16	 p.16
Heating Capacity (kW)	2.5		
	3.5		
	4.0		
	5.0	CS-E15DTEW (CU-E15DBE)	CS-E15DD3EW (CU-E15DBE)
	6.0	CS-E18DTEW (CU-E18DBE)	CS-E18DD3EW (CU-E18DBE)
	7.0	CS-E21DTEW (CU-E21DBE)	CS-E21DD3EW (CU-E21DBE)
	8.0		
Exclusive Features			

Single Split			
	Wall-Mounted		Floor or Ceiling
Indoor	Deluxe p.17	Deluxe Wide p.17	 p.17
Cooling Capacity (kW)	2.5	CS-V7DKE (CU-V7DKE) A	
	3.0	CS-V9DKE (CU-V9DKE) A	
	4.0	CS-V12DKE (CU-V12DKE) A	CS-V12CTP (CU-V12CTP5)
	5.0		CS-V18CTP (CU-V18CTP5)
	7.0	CS-V18DKE (CU-V18DKE) A	CS-V24CTP (CU-V24CTP5)
	8.0	CS-V24DKE (CU-V24DKE)	
Air Quality Features			

Multi Inverter Split 										
Wall-Mounted			Floor or Ceiling	Cassette (1-way)	Cassette (4-way)	Hide-Away	Outdoor	2 rooms	3 rooms	4 rooms
Indoor	Deluxe  p.18-p.19	Deluxe Wide  p.18-p.19	 p.18-p.19	 p.18-p.19	 p.18-p.19	 p.18-p.19				
	Cooling Capacity (kW)									
2.2	CS-CE7GKEW			CS-ME7EB1E						
2.8	CS-CE9GKEW		CS-ME10DTEG	CS-ME10EB1E		CS-ME10DD3EG		 CU-2E15GBE  (4.4-5.4kW)	CU-3E18EBE  (5.0-9.0kW)	CU-4E27CBPG  (5.0-13.6kW)
3.2	CS-CE12GKEW			CS-ME12EB1E				 CU-2E18CBPG  (4.4-6.4kW)	CU-3E23CBPG  (5.0-10.0kW)	
4.0	CS-E15GKEW		CS-E15DTEW	CS-ME14EB1E	CS-E15DB4EW	CS-E15DD3EW				
5.0		CS-E18GKEW	CS-E18DTEW		CS-E18DB4EW	CS-E18DD3EW				
Exclusive Features	 	 	 (option)		 (option)		See the table on page 19 for indoor unit and outdoor unit combinations.			

Heat Pump Models
Cooling Models

Heating Possible at -20°C

HIGH COP High COP

+8°C/+10°C Low-Temperature Heating

Heating Possible -10°C

e-ion Air Purifying System

Patrol Sensor

Supersonic Air Purifying System

Super alleru-buster filter (Super alleru-buster + Catechin + Bio)

ION Ion Freshener

-15°C Low Ambient Cooling



Mark indicating product meets German safety standards.



Panasonic is participating in the EUROVENT Certification Programme. Products are as listed in the EUROVENT Directory of Certified Products.

The 3 rooms and 4 rooms Multi-Split Type are not in the scope of the EUROVENT certification.

Nordic design

Super Deluxe
HE series



Heating Possible
-20°C*

+

High
COP

Powerful Heating Plus Top-Class Energy Efficiency

Powerful heating is yours even during the coldest months of the year. Better still, energy-saving operation means you don't have to worry about expensive electricity bills even when using the unit for extended periods.



INVERTER

Unique design delivering a powerful
jet stream of warm air toward your feet




energy saving

Top-class energy efficiency


High
COP

Our heatpumps have attained the highest Energy-Efficiency Classification, Class A, which places them in the industry's top class of energy savers.

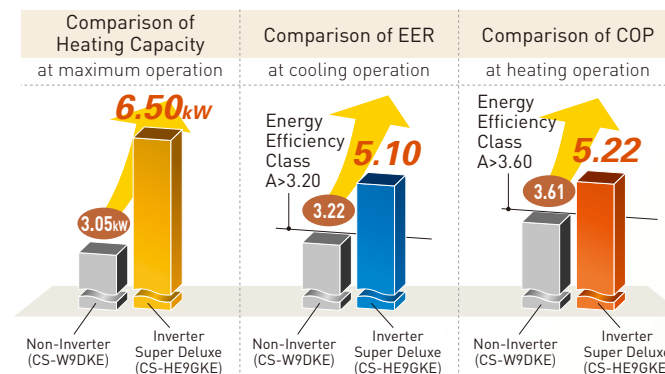

■ Powerful, energy-saving scroll compressor

Panasonic heatpumps use a scroll compressor featuring the latest technologies to provide quiet, highly efficient, environment-friendly operation.



air cleaning

SUPER alleru-buster filter



The SUPER alleru-buster filter combines three effects in one—anti-allergen, anti-virus, anti-bacteria protection—to keep room air clean and healthful.

Anti-allergen protection

Inactivates more than **99%** of all filter-captured allergens

Here, inactivate means to suppress normal activity. This inactivation of mite allergens has been verified by the University of Edinburgh in the UK.

Anti-virus protection

Inactivates more than **99%** of all filter-captured viruses

Anti-bacteria/
Anti-mould protection

Enzymatic action eliminates more than **99%** of all filter-captured bacteria

powerful heating

Heating possible at -20°C

Heating Possible
-20°C*


Providing outstanding cold climate performance, Panasonic heatpumps let you enjoy stable heating even when the outside temperature is below freezing. And to assure uniform heating throughout the house, a big flap deflects warm air toward the floor to keep your feet comfortable.

■ Sends a jet stream of warm air toward your feet

Forces warm air downward

The big flap deflects warm air toward the floor.

- The flap opens downward and forces warm air down.
- Delivers a powerful flow of warm air toward your feet.

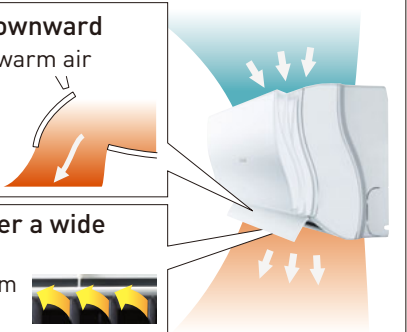

Sends warm air over a wide horizontal area

You can direct the warm air where you want it.

quiet

Super Quiet

The indoor unit delivers quiet operation with low fan speed. And pressing the Quiet mode button lowers operation noise even further to just 24dB.

24dB^{*1}
Indoor



47dB^{*2}
Outdoor



*1 CS-HE9GKE: In the Quiet mode during heating operation with low fan speed
In cooling mode, operation noise further decreased to 23dB
*2 CU-HE9GKE: In heating mode

Elegant design

Featuring a Drive Flat Panel that opens only during operation, the curved form of the elegant, stylish design projects the image of naturally flowing air.



Nordic design

Deluxe
NE series



Heating
Possible
-20°C*

+

Freezing
Prevention
Heating

Ideal for Heating Your Summer House to Prevent Freezing

You can also use +8°C/+10°C low-temperature heating. This lets you prevent your home from freezing during the midwinter months by maintaining indoor temperature with minimum heating energy.

INVERTER

Powerful and quiet – and highly efficient
for reduced heating costs



freezing prevention heating

+8°C/+10°C low-temperature heating

During the coldest times of the year, you can set heating to the optimum temperature to prevent freezing. This handy feature helps minimize heating costs for your summer house, garage and basement. And because it's a heatpump system, energy saving is boosted for a dramatic reduction in electricity consumption.



powerful heating

Heating possible at -20°C*

Heating
Possible
-20°C*

Providing outstanding cold climate performance, Panasonic heatpumps let you enjoy stable heating even when the outside temperature is below freezing. Add to this exceptional durability and reliability and you're looking at worry-free operation for round-the-clock comfort during the harsh Nordic winter.

air cleaning

SUPER alleru-buster filter



The SUPER alleru-buster filter combines three effects in one—anti-allergen, anti-virus, anti-bacteria protection—to keep room air clean and healthful.

Anti-allergen
protection

Inactivates more than **99%**
of all filter-captured allergens

Here, inactivate means to suppress normal activity. This inactivation of mite allergens has been verified by the University of Edinburgh in the UK.

Anti-virus
protection

Inactivates more than **99%**
of all filter-captured viruses


Anti-bacteria/
Anti-mouldprotection

Enzymatic action eliminates
more than **99%** of
all filter-captured bacteria

energy saving


Powerful heating and class-leading energy efficiency

On top of the powerful heating, the longer you use the unit the more you can enjoy class-leading operation efficiency, which means to an even bigger energy-saving effect. In other words, minimal heating costs.

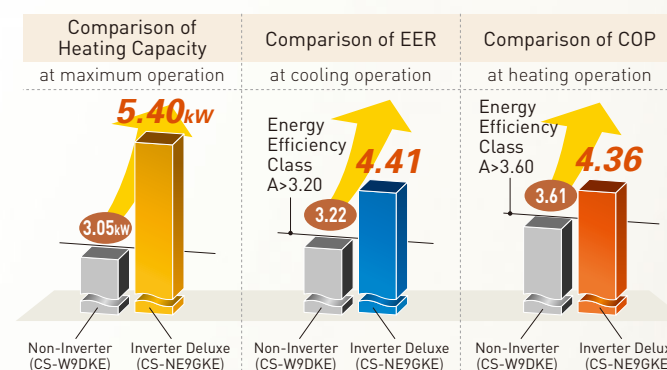

Powerful, energy-saving scroll compressor

Panasonic heatpumps use a scroll compressor featuring the latest technologies to provide quiet, highly efficient, environment-friendly operation.




quiet

Super quiet

The indoor unit delivers quiet operation with low fan speed. And pressing the Quiet mode button lowers operation noise even further to just 22dB.



22dB
Indoor



46dB
Outdoor

*1 CS-NE7GKE: In the Quiet mode during heating operation with low fan speed
In cooling mode, operation noise further decreased to 21dB
*2 CU-NE7GKE: In heating mode



-15°C Low Ambient Cooling

Special specifications also enable year-round cooling even during the cold of winter. This is ideal, for example, for computer/server rooms or other locations with temporary or year-round heat sources. *Operating temperature limit is -15°C.

Nordic design

Deluxe
CE series



Heating
Possible
-10°C




e-ion
Air Purifying System

Healthier Air Quality with Greater Comfort

e-ion Air Purifying System with Patrol Sensor

In addition to better air quality than ever,
these deluxe models offer surprising energy savings
and fine temperature control.

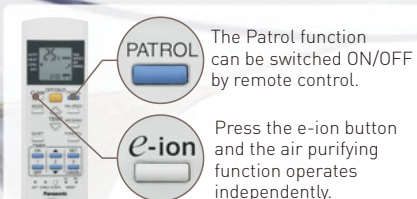

INVERTER


2-in-1 value with
full-scale air purifying



air cleaning

e-ion Air Purifying System with Patrol Sensor

A revolutionary new mechanism catches dust particles and brings them back to the filter, working with the Patrol Sensor to thoroughly clean the air.

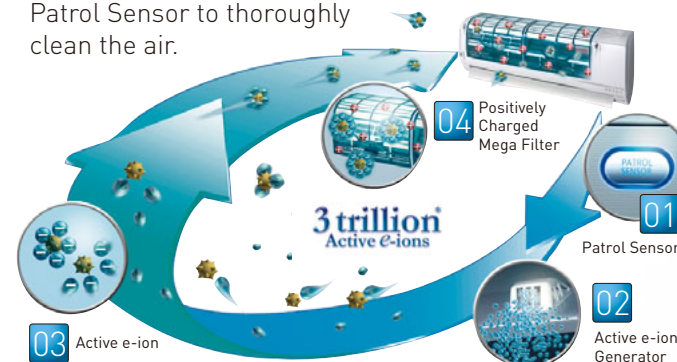

* 3 trillion is the simulated number of active e-ions under the mentioned conditions. Actual measured active e-ions at the centre of the room (13m²):100k/cc Calculated number of active e-ions in the entire room assuming they are evenly distributed.


Active e-ion

Shot out to catch and inactivate airborne bacteria and mould

A revolutionary new mechanism catches dust particles and brings them back to the filter, working with the Patrol Sensor to thoroughly clean the air.


■ Negative Charging

Negatively charges dust particles for effective collection.



■ Inactivating

Inactivates bacteria and mould to make them harmless.



Inactivating Effect

■ Target substances



Mould



Viruses



Bacteria


Inactivates more than 99%*

*99% inactivation was certified as indicated below.
Certified by Japan Food Research Laboratories
• Test report number: No.205010211-001
Bacteria: Staphylococcus aureus subsp. aureus (NBRC12732)
• Test report number: No.204101750-001
Virus: Influenza virus A

energy saving

Powerful heating and class A energy efficiency


Panasonic's heatpumps have achieved exceptional efficiency.

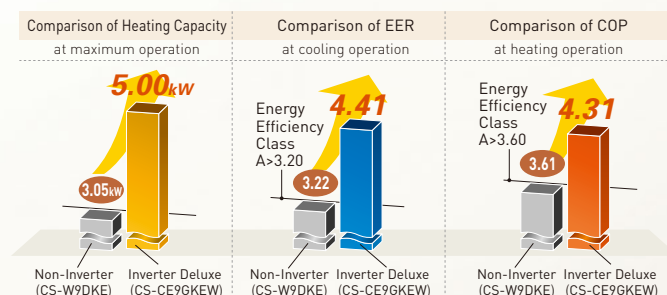

Patrol Sensor

A sensor monitors dirt in a room 24 hours a day!

Air is monitored both during the unit operation and when it's switched off. When dirt is detected, the air purifying function is started to immediately clean the air in the room.

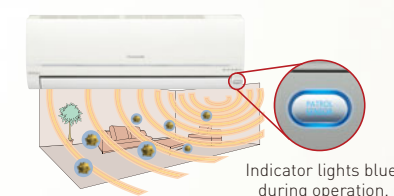


This kind of dirt is detected



Mega e-ion Filter

Big and electric – that's why the dust can't escape!

Using the force of attraction between positive and negative charges, the e-ion Filter – which is 7 times bigger and finer than ever – powerfully captures dust particles.

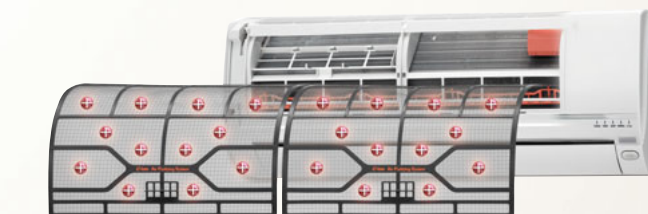

8 patents* applied for

Only from Panasonic

*Panasonic has applied for 8 patents relate to e-ion Air Purifying technology.
*1 For a heatpump with a dust collection system that releases negative ions from an ion generator to negatively charge dust particles and then collect them with the entire surface of a positively charged filter.
(As of June, 2007)


Thorough Collection with a Bigger, Finer Filter

The mega size air purifying filter covers almost the same area as the intake grille to prevent dust from escaping.

Conventional

e-ion Filter

The filter covers the entire grille area.



50%
finer

More Effective Collection with Electric Action

The entire filter is positively charged to powerfully attract negatively charged dust.



About
5
times* more
efficient

*After 5 cigarettes were smoked in a roughly 20m³ room, heatpump operation was started and the decrease in particulate concentration was measured with a dust meter.


Inverter Technology



Advanced Inverter Performance —The Difference in Power and Comfort

The inverter circuit provides optimum power control and extremely efficient operation by changing the frequency of the power supply. So even though you get speedy, flexible operation, you use less electricity than conventional units.

WHAT'S AN INVERTER?



An inverter is a type of power conversion circuit that electronically regulates the voltage, current, and frequency of a device. In an inverter heatpump, this circuit controls the revolutions of the compressor — and hence the heatpump's output. Raising the frequency increases the output, lowering the frequency reduces it. In this way, inverter heatpumps provide much finer temperature control than non-inverter models.

More Advantages with Panasonic



DC Inverter (Hyper Wave Inverter)

Original Panasonic inverter circuit technology provides detailed motor current control. A comfortable room temperature is maintained with less energy, vibration, and noise.

Our conventional inverter

The current waveform deviates from the motor voltage waveform, so power is wasted.




Hyper Wave Inverter

The current waveform closely matches the motor voltage waveform, so power consumption is reduced.




Compare this to a car rounding a corner

Power is wasted when the car swings off course.



When the car stays right on course, there's no power loss.




HE/ NE series: all models
Except HE/NE series: 15,000 Btu/h and above models

e-scroll Compressor

Saves energy:
Newly developed bearing reduces oscillation and mechanical loss.

Compact size, light weight:
New DC motor with rare-earth magnet and no accumulator.

Less noise and vibration:
Smooth, continuously operating vortex blades.



HE/ NE series: all models
Except HE/NE series: 15,000 Btu/h and above models

Even Wider Output Power Range


Provides higher energy saving and finer room temperature adjustment.

Minimum power	Medium power	Maximum power
0.6kW	3.6kW	6.5kW

The graph shows the CS-HE9GKE's wide power output range during heating.

The advantages of an inverter heatpump


Comparing inverter and non-inverter heatpumps to cars...

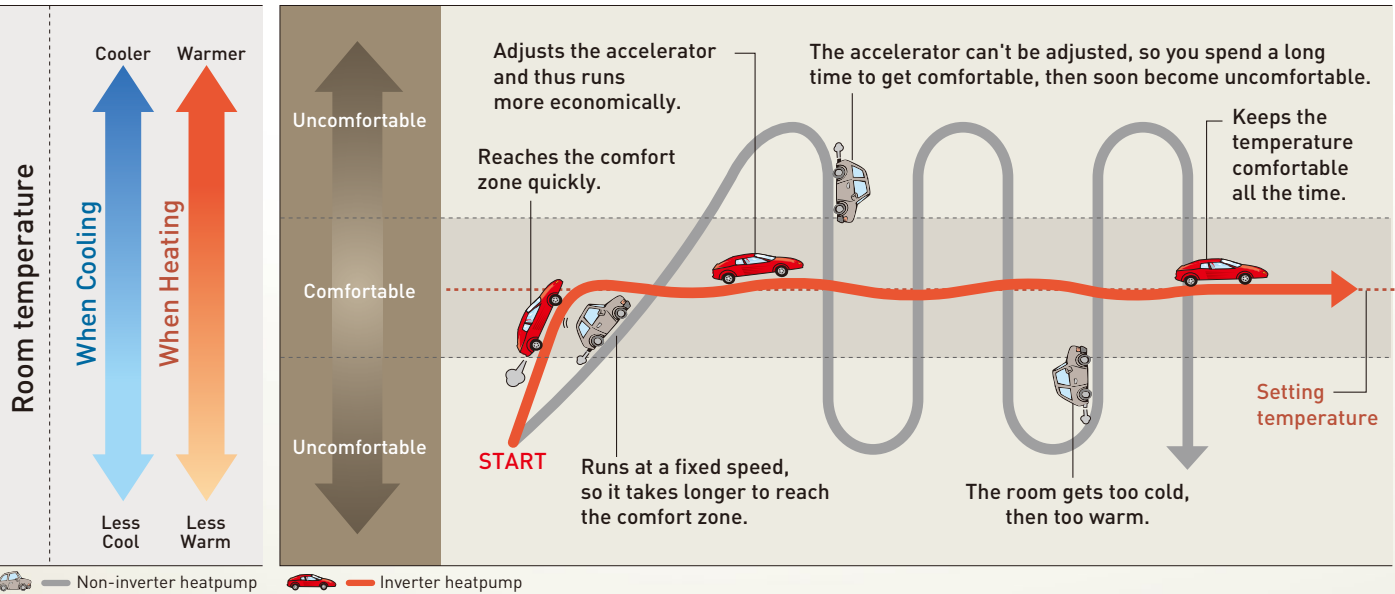

Quick comfort

As soon as the an inverter heatpump is switched on, it provides the exact amount of power needed to rapidly cool or heat of the room. This enables it to reach the set temperature in about a quarter the time required by non-inverter models. So you're comfortable soon after you arrive home on a hot summer day, or on a cold winter morning.

Quick comfort

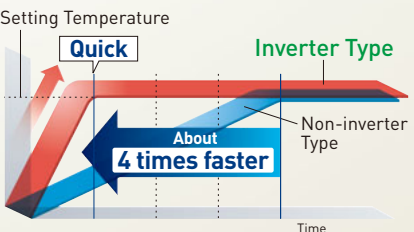


*Comparison of 9,000 Btu inverter and non-inverter models during heating.

Energy-saving

For optimum use of limited energy resources, an inverter heatpump features an inverter circuit providing extremely efficient operation. Improved heat exchanger and compressor performance, precise microcomputer control and other innovations further assure dramatically boosted efficiency. So even though you get speedy, flexible operation, you use less electricity.


Electric Consumption

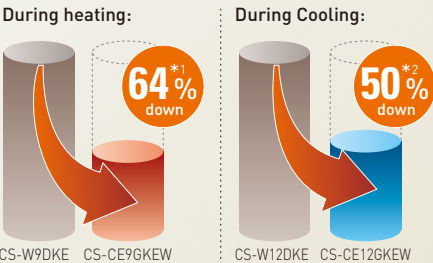

*1 Comparison of cumulative electricity consumption during heating to reach the setting temperature (Panasonic in-house comparison) Test conditions: Indoor and outdoor temperature: 7°C/ Setting temperature: 25°C/ Fan speed: High *2 Comparison of cumulative electricity consumption during 8 hours of cooling (Panasonic in-house comparison) Test conditions: Room temperature at start: 35°C/ Setting temperature: 25°C

Flexible power control


You're always comfortable with an inverter heatpump. After quickly reaching the set temperature, it finely adjusts output power to maintain a constant temperature. So there are no uncomfortable temperature swings, while electricity is used more efficiently. Broad output power capability also assures continued comfort even if the number of people in a room changes. And at maximum output, an inverter heatpump can deliver warm comfort even in the coldest winters.

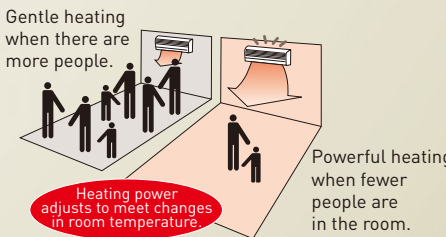

Single Inverter Split
Wall-Mounted

Single Inverter Split
Wall-Mounted

Nordic Super Deluxe

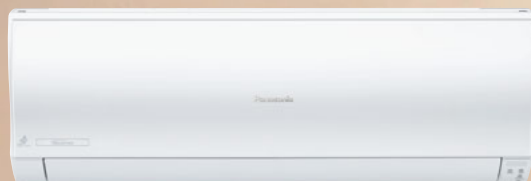Heating Possible
-20°C

High COP

With Bilingual Sticker






CU-HE9GKE/HE12GKE

Model No	CS-HE9GKE	CS-HE12GKE
Capacity(kW)	2.60(0.60~3.00)/3.60(0.60~6.50)	3.50(0.60~4.00)/4.80(0.60~7.70)
EER/COP(W/W)	5.10  /5.22 	4.12  /4.62 



Nordic Deluxe

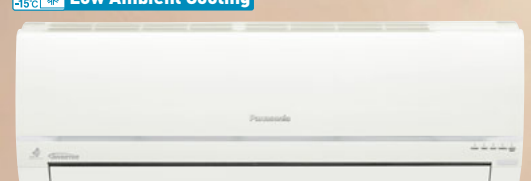Low Ambient Cooling
-15°C

Heating Possible
-20°C

Freezing Prevention Heating

With Bilingual Sticker





CU-NE7GKE/NE9GKE
NE12GKE


Model No	CS-NE7GKE	CS-NE9GKE	CS-NE12GKE
Capacity(kW)	2.05(0.60~2.40)/2.80(0.60~4.00)	2.60(0.60~3.00)/3.60(0.60~5.40)	3.50(0.60~4.00)/4.80(0.60~6.60)
EER/COP(W/W)	4.46  /4.52 	4.41  /4.36 	3.80  /3.84 



Low Ambient Cooling
-15°C

Special specifications also enable year-round cooling even during the cold of winter. This is ideal, for example, for computer/server rooms or other locations with temporary year-round heat sources.
* Operating temperature limit is -15°C.

Nordic Deluxe

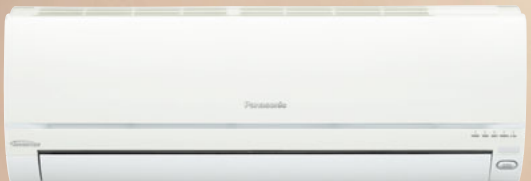Heating Possible
-10°C

e-ion Air Purifying System

With Bilingual Sticker






CU-CE7GKE/
CE9GKE/
CE12GKE

Model No	CS-CE7GKEW	CS-CE9GKEW	CS-CE12GKEW
Capacity(kW)	2.05(0.70~2.40)/2.80(0.70~4.00)	2.60(0.80~3.00)/3.60(0.80~5.00)	3.50(0.80~4.00)/4.80(0.80~6.50)
EER/COP(W/W)	4.27  /4.31 	4.41  /4.31 	3.83  /3.81 



Deluxe

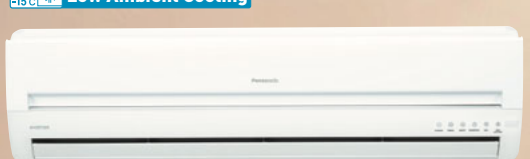

Low Ambient Cooling
-15°C

With Bilingual Sticker





CU-E15EKEA/E18EKEA
E21EKEA

Model No	CS-E15EKEA	*Different Design CS-E18EKEA	CS-E21EKEA
Capacity(kW)	4.40(0.90~5.00)/5.50(0.90~7.10)	5.30(0.90~6.00)/6.60(0.90~8.00)	6.30(0.90~7.10)/7.20(0.90~8.50)
EER/COP(W/W)	3.21  /3.50	3.21  /3.69 	2.85/3.43



Low Ambient Cooling
-15°C

Special specifications also enable year-round cooling even during the cold of winter. This is ideal, for example, for computer/server rooms or other locations with temporary year-round heat sources.
* Operating temperature limit is -15°C.

Deluxe Slim




With Bilingual Sticker





CU-TE9DKE/TE12DKE

Model No	CS-TE9DKE	CS-TE12DKE
Capacity(kW)	2.60(0.60~3.00)/3.60(0.60~5.30)	3.50(0.60~4.00)/4.80(0.60~6.50)
EER/COP(W/W)	4.48  /4.26 	3.89  /3.64 



Single Inverter Split Floor or Ceiling



Indoor unit: installed in a ceiling



Indoor unit: installed on a floor

With Bilingual Sticker



CU-E15DBE/E18DBE/E21DBE

Height difference: 15m

Model No	CS-E15DTEW	CS-E18DTEW	CS-E21DTEW
Capacity(kW)	4.15(0.90~4.55)/5.17(0.90~6.30)	5.00(0.90~5.40)/6.10(0.90~7.60)	5.80(0.90~6.60)/6.80(0.90~8.10)
EER/COP(W/W)	3.22 /3.34	3.01/3.35	3.01/3.42



(option)

Cassette (4-way)




Panel CZ-BT20E

With Bilingual Sticker



CU-E15DBE/E18DBE/E21DBE

Height difference: 15m

Model No	CS-E15DB4EW	CS-E18DB4EW	CS-E21DB4ES
Capacity(kW)	4.10(0.90~4.80)/5.10(0.90~6.20)	4.80(0.90~5.70)/5.60(0.90~7.10)	5.90(0.90~6.30)/7.00(0.90~8.00)
EER/COP(W/W)	3.15/2.88	3.14/2.95	2.88/2.86



(option)

Hide-Away



With Bilingual Sticker



CU-E15DBE/E18DBE

Height difference: 15m

Model No	CS-E15DD3EW	CS-E18DD3EW
Capacity(kW)	4.10(0.90~4.70)/4.80(0.90~5.50)	5.10(0.90~5.70)/6.10(0.90~7.10)
EER/COP(W/W)	3.31 /2.64	3.15/3.30

Single Split Wall-Mounted



With Bilingual Sticker



CU-V7DKE



CU-V9DKE/V12DKE

Model No	CS-V7DKE	CS-V9DKE	CS-V12DKE
Capacity(kW)	2.40	3.00	3.68
EER/COP(W/W)	3.24	3.21	3.23







With Bilingual Sticker



CU-V18DKE/V24DKE/V28EKE

Model No	CS-V18DKE	CS-V24DKE	CS-V28EKE Different Design
Capacity(kW)	5.30	7.03	7.91
EER/COP(W/W)	3.25	2.70	3.22





Floor or Ceiling



Indoor unit: installed in a ceiling



Indoor unit: installed on a floor

With Bilingual Sticker



CU-V12CTP5



CU-V18CTP5/V24CTP5

Model No	CS-V12CTP	CS-V18CTP	CS-V24CTP
Capacity(kW)	3.52	5.30	7.03
EER/COP(W/W)	3.20	3.17	2.58

Multi Inverter Split

Wall-Mounted

Deluxe



With Bilingual Sticker

Deluxe Wide



With Bilingual Sticker

Model No

CS-CE7GKEW

CS-CE9GKEW

CS-CE12GKEW★

CS-E15GKEW★

Cooling Capacity

2.2kW class

2.8kW class

3.2kW class

4.0kW class



Model No

CS-E18GKEW★

Cooling Capacity

5.0kW class



Cassette (1-way)



Panel CZ-BT20P

With Bilingual Sticker

Model No

CS-ME7EB1E

CS-ME10EB1E

CS-ME12EB1E

CS-ME14EB1E

Cooling Capacity

2.2kW class

2.8kW class

3.2kW class

4.0kW class



(option)

Model No

CS-E15DB4EW★

CS-E18DB4EW★

Cooling Capacity

4.0kW class

5.0kW class



(option)

Cassette (4-way)



Panel CZ-BT20E

With Bilingual Sticker

Model No

CS-E15DB4EW★

CS-E18DB4EW★

Cooling Capacity

4.0kW class

5.0kW class



(option)

Floor or Ceiling



With Bilingual Sticker

Model No

CS-ME10DTEG

CS-E15DTEW★

CS-E18DTEW★

Cooling Capacity

2.8kW class

4.0kW class

5.0kW class



(option)

Model No

CS-ME10DD3EG

CS-E15DD3EW★

CS-E18DD3EW★

Cooling Capacity

2.8kW class

4.0kW class

5.0kW class



CS-ME10DD3EG

Hide-Away



With Bilingual Sticker

Model No

CS-ME10DD3EG

CS-E15DD3EW★

CS-E18DD3EW★

Cooling Capacity

2.8kW class

4.0kW class

5.0kW class



CS-ME10DD3EG

2 rooms

NEW



CU-2E15GBE



CU-2E18CBPG

3 rooms



CU-3E18EBE

CU-3E23CBPG

4 rooms



CU-4E27CBPG

Additional Parts

Pipe Size Reducer



CZ-MA1P

For the indoor units marked with a star (★), the pipe size reducer must be used.

Advantages of the Multi Inverter System


Indoor unit

A variety of indoor units

Air-quality features (Wall-mounted type only)

- e-ion Air Purifying System
- Patrol Sensor

Adjust the operation settings for each indoor unit independently

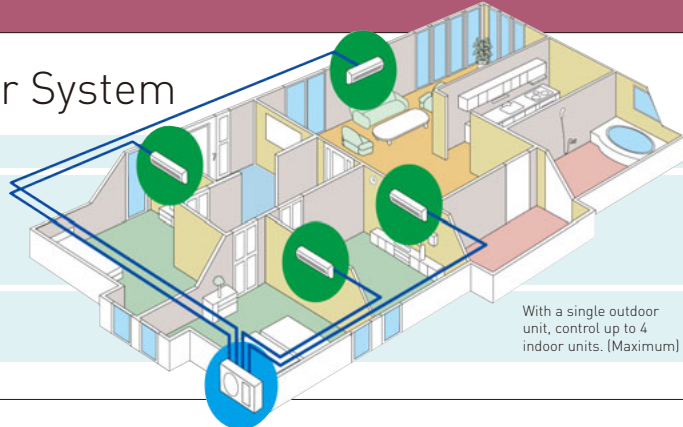

With a single outdoor unit, control up to 4 indoor units. (Maximum)

Combination Patterns

	Models	Indoor Units: Possible Combination Patterns Must be within capacity range.	Capacity Range	Refrigerant Pipe Diameter			Pipe Extension					Indoor Unit Combinations					
				Indoor Unit	Liquid Side	Gas Side	Maximum Pipe Length (1 room)	Maximum Pipe Length (Total)	Maximum Chargeless Length	Additional Gas	Maximum Height	Type Capacity [kW class]	Wall- Mounted	Cassette (1-way)	Cassette (4-way)	Floor or Ceiling	Hide- Away
2 rooms	CU-2E15GBE	 Dimensions [HxWxD]: 540 x 780(+70) x 289 mm Weight: 38 kg	4.4 5.4 kW Make sure to keep combina- tions within this range.	Room A	ø 6.35	ø 9.52	20 m	30 m	20 m	20 g/m	10 m	2.2	●				
												2.8	●			●	●
				Room B	ø 6.35	ø 9.52						3.2	●	●			
3 rooms	CU-2E18CBPG	 Dimensions [HxWxD]: 540 x 780(+70) x 289 mm Weight: 38 kg	4.4 6.4 kW Make sure to keep combina- tions within this range.	Room A	ø 6.35	ø 9.52	20 m	30 m	20 m	20 g/m	10 m	2.2	●				
												2.8	●			●	●
				Room B	ø 6.35	ø 9.52						3.2	●				
4 rooms	CU-3E18EBE	 Dimensions [HxWxD]: 735 x 826(+73) x 300 mm Weight: 49 kg	5.0 9.0 kW Make sure to keep combina- tions within this range.	Room A	ø 6.35	ø 9.52	25 m	50 m	30 m	20 g/m	15 m	2.2	●	●			
												2.8	●	●		●	●
				Room B	ø 6.35	ø 9.52						3.2	●	●			
												4.0	●	●	●	●	●
				Room C	ø 6.35	ø 9.52						5.0	●	●		●	●
4 rooms	CU-3E23CBPG	 Dimensions [HxWxD]: 735 x 826(+110) x 300 mm Weight: 57 kg	5.0 10.0 kW Make sure to keep combina- tions within this range.	Room A	ø 6.35	ø 9.52	25 m	50 m	30 m	20 g/m	15 m	2.2	●	●			
												2.8	●	●		●	●
				Room B	ø 6.35	ø 9.52						3.2	●	●			
												4.0	●	●	●	●	●
				Room C	ø 6.35	ø 9.52						5.0	●	●		●	●
4 rooms	CU-4E27CBPG	 Dimensions [HxWxD]: 908 x 900 x 320 mm Weight: 73 kg	5.0 13.6 kW Make sure to keep combina- tions within this range.	Room A	ø 6.35	ø 9.52	25 m	70 m	40 m	20 g/m	15 m	2.2	●	●			
												2.8	●	●		●	●
				Room B	ø 6.35	ø 9.52						3.2	●	●			
												4.0	●	●	●	●	●
				Room C	ø 6.35	ø 9.52						5.0	●	●		●	●

Specifications

Single Inverter Split



Cooling
Heating

Model		(50Hz)	CS-HE9GKE (CU-HE9GKE)	CS-HE12GKE (CU-HE12GKE)	CS-NE7GKE (CU-NE7GKE)	CS-NE9GKE (CU-NE9GKE)	CS-NE12GKE (CU-NE12GKE)	CS-CE7GKEW (CU-CE7GKE)	CS-CE9GKEW (CU-CE9GKE)	CS-CE12GKEW (CU-CE12GKE)	CS-E15EKEA (CU-E15EKEA)	CS-E18EKEA (CU-E18EKEA)	CS-E21EKEA (CU-E21EKEA)
Cooling Capacity	kW		2.60 (0.60 - 3.00)	3.50 (0.60 - 4.00)	2.05 (0.60 - 2.40)	2.60 (0.60 - 3.00)	3.50 (0.60 - 4.00)	2.05 (0.70 - 2.40)	2.60 (0.80 - 3.00)	3.50 (0.80 - 4.00)	4.40 (0.90 - 5.00)	5.30 (0.90 - 6.00)	6.30 (0.90 - 7.10)
			2,240 (520 - 2,580)	3,010 (520 - 3,440)	1,760 (520 - 2,060)	2,240 (520 - 2,580)	3,010 (520 - 3,440)	1,760 (600 - 2,060)	2,240 (690 - 2,580)	3,010 (690 - 3,440)	3,780 (770 - 4,300)	4,560 (770 - 5,160)	5,420 (770 - 6,110)
EER	W/W		5.10	4.12	4.46	4.41	3.80	4.27	4.41	3.83	3.21	3.21	2.85
Heating Capacity	kW		3.60 (0.60 - 6.50)	4.80 (0.60 - 7.70)	2.80 (0.60 - 4.00)	3.60 (0.60 - 5.40)	4.80 (0.60 - 6.60)	2.80 (0.70 - 4.00)	3.60 (0.80 - 5.00)	4.80 (0.80 - 6.50)	5.50 (0.90 - 7.10)	6.60 (0.90 - 8.00)	7.20 (0.90 - 8.50)
			3,100 (520 - 5,590)	4,130 (520 - 6,620)	2,410 (520 - 3,440)	3,100 (520 - 4,640)	4,130 (520 - 5,680)	2,410 (600 - 3,440)	3,100 (690 - 4,300)	4,130 (690 - 5,590)	4,730 (770 - 6,110)	5,680 (770 - 6,880)	6,190 (770 - 7,310)
COP	W/W		5.22	4.62	4.52	4.36	3.84	4.31	4.31	3.81	3.50	3.69	3.43
Electrical Data	Voltage	V	230	230	230	230	230	230	230	230	230	230	230
	Running Current	A	2.4 3.2	4.0 4.8	2.2 3.0	2.8 3.9	4.3 5.8	2.3 3.1	2.8 3.9	4.2 5.8	6.3 7.1	7.5 8.1	9.9 9.3
	Power Input	W	510 (120 - 700) 690 (115 - 1,720)	850 (120 - 1,050) 1,040 (115 - 2,280)	460 (120 - 560) 620 (115 - 920)	590 (120 - 750) 825 (115 - 1,360)	920 (120 - 1,180) 1,250 (115 - 1,850)	480 (170 - 590) 650 (160 - 1,020)	590 (175 - 750) 835 (165 - 1,340)	915 (185 - 1,180) 1,260 (175 - 1,890)	1,370 (215 - 1,600) 1,570 (245 - 2,250)	1,650 (215 - 2,050) 1,790 (245 - 2,650)	2,210 (215 - 2,540) 2,100 (245 - 2,750)
Noise	Sound Pressure Level Indoor (Hi/Lo/S-Lo)	dB(A)	39/26/23 42/27/24	42/29/26 44/33/30	37/24/21 38/25/22	39/26/23 40/27/24	42/29/26 42/33/30	37/24/21 38/25/22	39/25/21 40/27/24	42/28/21 42/33/30	43/32/29 43/35/32	44/37/34 44/37/34	45/37/34 45/37/34
	Outdoor (Hi)	dB(A)	46 47	48 50	45 46	46 47	48 50	45 46	46 47	48 50	46 46	47 47	48 49
	Sound Power Level* Indoor (Hi)	dB	52 53	55 55	48 49	50 51	53 53	48 49	50 51	53 53	54 54	57 57	58 58
	Outdoor (Hi)	dB	59 60	61 63	58 59	59 60	61 63	58 59	59 60	61 63	59 59	60 60	61 62
Moisture Removal	L/h		1.6	2.0	1.3	1.6	2.0	1.3	1.6	2.0	2.4	2.9	3.5
External Static Pressure	Pa (mmAq)		—	—	—	—	—	—	—	—	—	—	—
Air Circulation (Indoor/Hi)	m3/min		10.5 12.5	11.3 13.5	10.0 10.5	10.6 11.2	11.4 11.9	9.8 10.3	10.4 11.0	11.2 11.7	11.0 11.8	15.2 16.7	16.2 17.3
Dimensions Indoor (Outdoor)	Height	mm	298 (540)	298 (540)	280 (540)	280 (540)	280 (540)	280 (540)	280 (540)	280 (540)	280 (750)	275 (750)	275 (750)
	Width	mm	870 (780)	870 (780)	799 (780)	799 (780)	799 (780)	799 (780)	799 (780)	799 (780)	799 (875)	998 (875)	998 (875)
	Depth	mm	199 (289)	199 (289)	183 (289)	183 (289)	183 (289)	183 (289)	183 (289)	183 (289)	183 (345)	230 (345)	230 (345)
Net Weight Indoor (Outdoor)	kg		12 (37)	12 (37)	9.0 (34)	9.0 (35)	9.0 (35)	9 (33)	9 (34)	9 (35)	9 (48)	11 (49)	11 (51)
Refrigerant Pipe Diameter	Liquid Side	mm inch	6.35 1/4"	6.35 1/4"	6.35 1/4"	6.35 1/4"	6.35 1/4"	6.35 1/4"	6.35 1/4"	6.35 1/4"	6.35 1/4"	6.35 1/4"	6.35 1/4"
	Gas Side	mm inch	9.52 3/8"	12.70 1/2"	9.52 3/8"	9.52 3/8"	12.70 1/2"	9.52 3/8"	9.52 3/8"	12.70 1/2"	12.70 1/2"	12.70 1/2"	12.70 1/2"
Pipe Extension Minimum Pipe Length	m		3	3	3	3	3	3	3	3	3	3	3
	Maximum Pipe Length**	m	15	15	15	15	15	15	15	15	15	20	20
Power Supply			Indoor	Indoor	Indoor	Indoor	Indoor	Outdoor	Outdoor	Outdoor	Indoor	Indoor	Indoor
Energy Saving Classification	Cooling Class		A	A	A	A	A	A	A	A	A	A	C
	Annual Energy Consumption	kW	255	425	230	295	460	240	295	460	685	825	1,105
	Heating Class		A	A	A	A	A	A	A	A	B	A	B

Rating Conditions

	Cooling	Heating
Inside air temperature	27°C DB/19°C WB	20°C DB
Outside air temperature	35°C DB/24°C WB	7°C DB/6°C WB

- * The cooling sound power level specification is based on EUROVENT Document 6/C/006-97.
** Additional Gas might be required for some models.
For models with the Air Purifying Filter, the specifications indicate values with the filter removed.

Caution (Important) Please do not use copper pipes which the thickness is less than 0.8mm.

Single Inverter Split



Cooling
Heating

Model		(50Hz)	CS-TE9DKE (CU-TE9DKE)	CS-TE12DKE (CU-TE12DKE)	CS-E15DTEW (CU-E15DBE)	CS-E18DTEW (CU-E18DBE)	CS-E21DTES (CU-E21DBE)	CS-E15DB4EW (CU-E15DBE)	CS-E18DB4EW (CU-E18DBE)	CS-E21DB4ES (CU-E21DBE)	CS-E15DD3EW (CU-E15DBE)	CS-E18DD3EW (CU-E18DBE)
Cooling Capacity	kW		2.60 (0.60 - 3.00)	3.50 (0.60 - 4.00)	4.15 (0.90 - 4.55)	5.00 (0.90 - 5.40)	5.80 (0.90 - 6.60)	4.10 (0.90 - 4.80)	4.80 (0.90 - 5.70)	5.90 (0.90 - 6.30)	4.10 (0.90 - 4.70)	5.10 (0.90 - 5.70)
			2,240 (520 - 2,580)	3,010 (520 - 3,440)	3,570 (770 - 3,910)	4,300 (770 - 4,640)	4,990 (770 - 5,680)	3,530 (770 - 4,130)	4,130 (770 - 4,900)	5,070 (770 - 5,420)	3,530 (770 - 4,040)	4,390 (770 - 4,900)
EER	W/W		4.48	3.89	3.22	3.01	3.01	3.15	3.14	2.88	3.31	3.15
Heating Capacity	kW		3.60 (0.60 - 6.50)	4.80 (0.60 - 7.70)	5.17 (0.90 - 6.30)	6.10 (0.90 - 7.60)	6.80 (0.90 - 8.10)	5.10 (0.90 - 6.20)	5.60 (0.90 - 7.10)	7.00 (0.90 - 8.00)	4.80 (0.90 - 5.50)	6.10 (0.90 - 7.10)
			3,100 (520 - 4,560)	4,130 (520 - 5,590)	4,450 (770 - 5,420)	5,250 (770 - 6,540)	5,850 (770 - 6,970)	4,390 (770 - 5,330)	4,820 (770 - 6,110)	6,020 (770 - 6,880)	4,130 (770 - 4,730)	5,250 (770 - 6,110)
COP	W/W		4.26	3.64	3.34	3.35	3.42	2.88	2.95	2.86	2.64	3.30
Electrical Data	Voltage	V	230	230	230	230	230	230	230	230	230	230
	Running Current	A	2.7 3.9	4.2 6.2	6.0 7.1	7.5 8.2	8.7 9.0	6.0 8.0	7.0 8.5	9.2 10.9	5.7 8.2	7.3 8.3
	Power Input	W	580 (120 - 720) 845 (115 - 1,360)	900 (120 - 1,160) 1,320 (115 - 1,880)	1,290 (255 - 1,550) 1,550 (260 - 2,050)	1,660 (255 - 1,890) 1,820 (260 - 2,380)	1,930 (255 - 2,240) 1,990 (260 - 2,650)	1,300 (255 - 1,710) 1,770 (260 - 2,180)	1,530 (255 - 1,930) 1,900 (260 - 2,450)	2,050 (255 - 2,200) 2,450 (260 - 2,820)	1,240 (255 - 1,500) 1,820 (260 - 2,090)	1,620 (255 - 1,840) 1,850 (260 - 2,200)
Noise	Sound Pressure Level Indoor (Hi/Lo/S-Lo)	dB(A)	39/26/23 40/27/24	42/29/26 42/33/30	45/37/34 45/33/30	46/39/36 47/35/32	47/41/38 47/37/34	34/26/23 35/28/25	36/28/25 37/29/26	41/33/30 42/34/31	33/27/24 35/28/25	41/30/27 41/32/29
	Outdoor (Hi)	dB(A)	46 47	48 50	46 47	47 48	48 49	45 47	47 48	49 49	46 47	47 48
	Sound Power Level* Indoor (Hi)	dB	50 51	53 53	58 58	59 60	60 60	47 48	49 50	54 55	49 51	57 57
	Outdoor (Hi)	dB	59 60	61 63	59 60	60 61	61 62	58 60	60 61	62 62	59 60	60 61
Moisture Removal	L/h		1.5	2.0	2.4	2.8	3.2	2.3	2.6	3.3	2.3	2.8
External Static Pressure	Pa (mmAq)		—	—	—	—	—	—	—	—	25 (2.55)	25 (2.55)
Air Circulation (Indoor/Hi)	m3/min		9.2 10.5	9.9 10.9	12.0 12.2	12.5 12.7	13.1 13.2	10.5 10.8	11.0 11.5	12.8 14.0	7.9 8.9	10.4 13.0
Dimensions Indoor/Panel** (Outdoor)	Height	mm	298 (540)	298 (540)	540 (750)	540 (750)	540 (750)	260/51 (750)	260/51 (750)	260/51 (750)	235 (750)	285 (750)
	Width	mm	799 (780)	799 (780)	1,028 (875)	1,028 (875)	1,028 (875)	575/700 (875)	575/700 (875)	575/700 (875)	750 (875)	750 (875)
	Depth	mm	139 (289)	139 (289)	200 (345)	200 (345)	200 (345)	575/700 (345)	575/700 (345)	575/700 (345)	370 (345)	370 (345)
Net Weight Indoor/Panel** (Outdoor)	kg		8 (33)	8 (34)	17 (48)	18 (48)	20 (49)	18.0/2.5 (48)	18.0/2.5 (48)	18.0/2.5 (49)	17 (48)	18 (48)
Refrigerant Pipe Diameter	Liquid Side	mm inch	6.35 1/4"	6.35 1/4"	6.35 1/4"	6.35 1/4"	6.35 1/4"	6.35 1/4"	6.35 1/4"	6.35 1/4"	6.35 1/4"	6.35 1/4"
	Gas Side	mm inch	9.52 3/8"	12.70 1/2"	12.70 1/2"	12.70 1/2"	12.70 1/2"	12.70 1/2"	12.70 1/2"	12.70 1/2"	12.70 1/2"	12.70 1/2"
Pipe Extension Minimum Pipe Length	m		3	3	3	3	3	3	3	3	3	3
	Maximum Pipe Length***	m	15	15	20	20	20	20	20	20	20	20
Power Supply			Indoor	Indoor	Outdoor	Outdoor	Outdoor	Outdoor	Outdoor	Outdoor	Outdoor	Outdoor
Energy Saving Classification	Cooling Class		A	A	A	B	B	B	B	C	A	B
	Annual Energy Consumption	kW	290	450	645	830	965	650	765	1,025	620	810
	Heating Class		A	A	C	C	B	D	D	D	E	C

Rating Conditions

	Cooling	Heating
Inside air temperature	27°C DB/19°C WB	20°C DB
Outside air temperature	35°C DB/24°C WB	7°C DB/6°C WB

- * The cooling sound power level specification is based on EUROVENT Document 6/C/006-97.
** Panel is applicable to cassette type only.
*** Additional Gas might be required for some models.
For models with the Air Purifying Filter, the specifications indicate values with the filter removed.

Caution (Important) Please do not use copper pipes which the thickness is less than 0.8mm.

Specifications

Single Split

Model		CS-V7DKE (CU-V7DKE)	CS-V9DKE (CU-V9DKE)	CS-V12DKE (CU-V12DKE)	CS-V18DKE (CU-V18DKE)	CS-V24DKE (CU-V24DKE)	CS-V28EKE (CU-V28EKE)	CS-V12CTP (CU-V12CTP5)	CS-V18CTP (CU-V18CTP5)	CS-V24CTP (CU-V24CTP5)
Cooling Capacity	kW	2.40	3.00	3.68	5.30	7.03	7.91	3.52	5.30	7.03
	kcal/h	2,060	2,580	3,160	4,560	6,050	6,800	3,030	4,530	6,050
EER	W/W	3.24	3.21	3.23	3.25	2.70	3.22	3.20	3.17	2.58
Electrical Data										
Voltage	V	230	230	230	230	230	230	230	230	230
Running Current	A	3.4	4.2	5.3	7.3	12.3	11.3	4.9	7.5	13.1
Power Input	W	740	935	1,140	1,630	2,600	2,460	1,100	1,670	2,730
Noise	Sound Pressure Level									
	Indoor (Hi/Lo)	dB(A)	33/26/23	35/26/23	39/29/26	42/37/34	46/40/37	49/44/41	39/33	45/39
	Outdoor (Hi)	dB(A)	46	48	49	54	54	55	49	55
	Sound Power Level*									
	Indoor (Hi)	dB	46	48	52	54	59	62	52	56
	Outdoor (Hi)	dB	61	63	64	69	69	70	63	68
Moisture Removal	L/h	1.5	1.7	2.1	2.9	4.0	4.6	2.0	2.9	3.5
Air Circulation (Indoor/Hi)	m ³ /min	7.8	8.5	9.5	14.8	16.9	20.1	9.7	12.2	12.9
Dimensions Indoor (Outdoor)										
Height	mm	280 (510)	280 (540)	280 (540)	275 (750)	275 (750)	340 (750)	540 (540)	540 (685)	540 (685)
Width	mm	799 (650)	799 (780)	799 (780)	998 (875)	998 (875)	1,150 (875)	1,028 (780)	1,028 (800)	1,028 (800)
Depth	mm	183 (230)	183 (289)	183 (289)	230 (345)	230 (345)	260 (345)	200 (289)	200 (300)	200 (300)
Net Weight Indoor (Outdoor)	kg	9 (25)	9 (31)	9 (33)	11.0 (50.0)	11.0 (59.0)	18.0 (62.0)	18 (37)	20 (60)	20 (63)
Refrigerant Pipe Diameter										
Liquid Side	mm inch	6.35 1/4"	6.35 1/4"	6.35 1/4"	6.35 1/4"	6.35 1/4"	6.35 1/4"	6.35 1/4"	6.35 1/4"	6.35 1/4"
Gas Side	mm inch	9.52 3/8"	9.52 3/8"	12.70 1/2"	12.70 1/2"	15.88 5/8"	15.88 5/8"	12.70 1/2"	12.70 1/2"	15.88 5/8"
Pipe Extension										
Minimum Pipe Length	m	3	3	3	3	3	3	3	3	3
Maximum Pipe Length**	m	10	10	15	25	25	30	15	25	25
Power Supply		Indoor	Indoor	Indoor	Indoor	Indoor	Indoor	Indoor	Indoor	Indoor
Energy Saving Classification	Cooling Class					D		B	B	E
	Annual Energy Consumption kW	370	470	570	815	1,300	1,230	550	835	1,365


Rating Conditions

	Cooling
Inside air temperature	27°C DB/19°C WB
Outside air temperature	35°C DB/24°C WB

Caution (Important) Please do not use copper pipes which the thickness is less than 0.8mm.

Energy-Efficiency Classifications

According to a new EC Directive, the indication of the Energy Efficiency classification on household heatpumps became compulsory. This aims to provide consumers with clear and objective information regarding energy-saving, and to encourage them to select products that are environmentally friendly. An Energy Label, like that shown in the sample below, will be provided in shop displays. In the label, the equipment is rated, with "A" being the most efficient. You may notice these labels and ratings appearing soon in shops that sell heatpumps. For easy understanding, the following information will be indicated for each model.

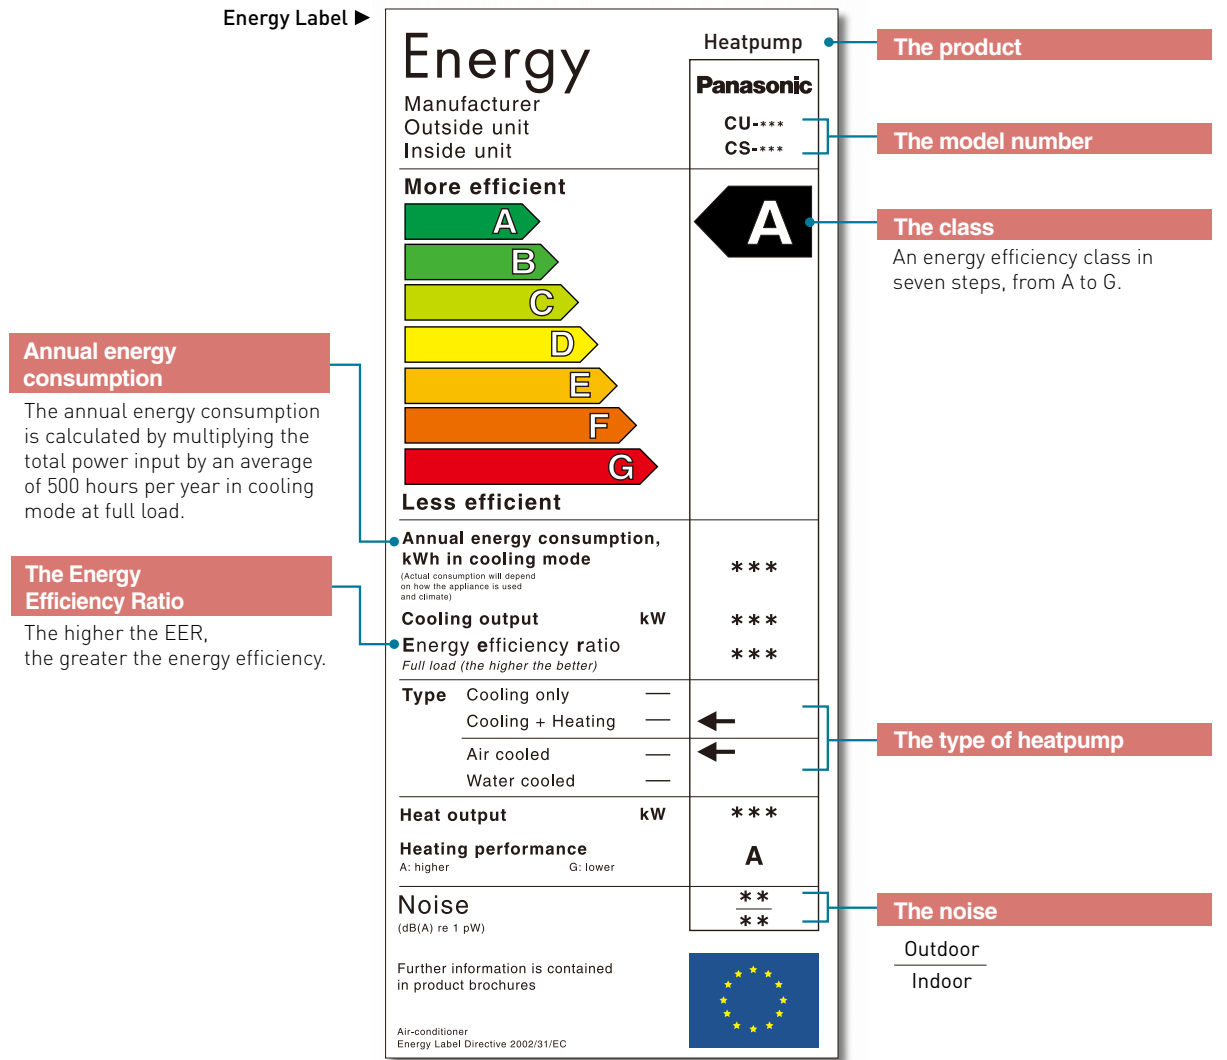

Classifications

There are seven classifications of energy efficiency, from A to G. The most efficient level is "A" and the least efficient level is "G."

Energy efficiency class of the unit in COOLING mode

	3.20 < EER
	3.20 ≥ EER > 3.00
	3.00 ≥ EER > 2.80
	2.80 ≥ EER > 2.60
	2.60 ≥ EER > 2.40
	2.40 ≥ EER > 2.20
	2.20 ≥ EER

Energy efficiency class of the unit in HEATING mode

	3.60 < COP
	3.60 ≥ COP > 3.40
	3.40 ≥ COP > 3.20
	3.20 ≥ COP > 2.80
	2.80 ≥ COP > 2.60
	2.60 ≥ COP > 2.40
	2.40 ≥ COP

These classifications are for split and multi-split air-cooled heatpumps.

Specifications

Multi Inverter Split : Indoor Units



Cooling
Heating

Wall-Mounted					
Model (Cooling Capacity)	CS-CE7GKEW (2.2 kW class)	CS-CE9GKEW (2.8 kW class)	CS-CE12GKEW (3.2 kW class)	CS-E15GKEW (4.0 kW class)	CS-E18GKEW (5.0 kW class)
Power Source	Single phase, 230 V, 50 Hz				
Noise (Hi/L0/S-Lo) Sound Pressure Level	dB(A) 40/29/26 40/29/26	40/29/26 40/29/26	44/32/29 44/32/29	44/32/29 44/33/30	46/33/30 46/35/32
Sound Power Level	dB 53/42 53/42	53/42 53/42	57/45 57/45	57/45 57/46	59/46 59/48
Fan Output	W 30	30	30	30	30
Dimensions					
Height	mm 280	280	280	280	275
Width	mm 799	799	799	799	998
Depth	mm 183	183	183	183	230
Net Weight	kg 9.0	9.0	9.0	9.0	10.0
Connecting Cable	3 + 1 (earth), ø1.5 mm²				
Refrigerant Pipe Diameter					
Liquid Side	mm 6.35	6.35	6.35	6.35	6.35
Gas Side	mm 9.52	9.52	12.70*	12.70*	12.70*

*A pipe size reducer (CZ-MA1P) must be used to reduce the pipe diameter to 9.52 mm at the connection port of the indoor unit.
For models with the Air Purifying Filter, the specifications indicate values with the filter removed.

Cassette (1-way)					Cassette (4-way)	
Model (Cooling Capacity)	CS-ME7EB1E (2.2 kW class)	CS-ME10EB1E (2.8 kW class)	CS-ME12EB1E (3.2 kW class)	CS-ME14EB1E (4.0 kW class)	CS-E15DB4EW (4.0 kW class)	CS-E18DB4EW (5.0 kW class)
Power Source	Single phase, 230 V, 50 Hz					
Noise (Hi/L0/S-Lo) Sound Pressure Level	dB(A) 40/32/29 42/32/29	40/32/29 42/32/29	41/32/29 43/32/29	43/32/29 44/34/31	34/26/23 35/28/25	36/28/25 37/29/26
Sound Power Level	dB 53/45 55/45	53/45 55/45	54/45 56/45	56/45 57/47	47/39 48/41	49/41 50/42
Fan Output	W 30	30	30	30	40	40
Dimensions						
Height	mm 185	185	185	185	260	260
Width	mm 770	770	770	770	575	575
Depth	mm 360	360	360	360	575	575
Net Weight	kg 9.8	9.8	9.8	10.5	18.0	18.0
Connecting Cable	3 + 1 (earth), ø1.5 mm²					
Refrigerant Pipe Diameter						
Liquid Side	mm 6.35	6.35	6.35	6.35	6.35	6.35
Gas Side	mm 9.52	9.52	9.52	9.52	12.70*	12.70*

*A pipe size reducer (CZ-MA1P) must be used to reduce the pipe diameter to 9.52 mm at the connection port of the indoor unit.

Floor or Ceiling				Hide-Away		
Model (Cooling Capacity)	CS-ME10DTEG (2.8 kW class)	CS-E15DTEW (4.0 kW class)	CS-E18DTEW (5.0 kW class)	CS-ME10DD3EG (2.8 kW class)	CS-E15DD3EW (4.0 kW class)	CS-E18DD3EW (5.0 kW class)
Power Source	Single phase, 230 V, 50 Hz					
Noise (Hi/L0/S-Lo) Sound Pressure Level	dB(A) 39/31/28 40/31/28	45/37/34 45/33/30	46/39/36 47/35/32	31/27/24 35/27/24	33/27/24 35/28/26	41/30/27 41/32/29
Sound Power Level	dB 52/44 53/44	58/50 58/46	59/52 60/48	47/43 51/43	49/43 51/44	57/46 57/48
Fan Output	W 51	51	51	30	30	30
External Static Pressure	Pa(mmAq) —	—	—	25 (2.55)	25 (2.55)	25 (2.55)
Air Circulation	m³/min —	—	—	7.0	7.8	10.3
Dimensions						
Height	mm 540	540	540	235	235	285
Width	mm 1,028	1,028	1,028	750	750	750
Depth	mm 200	200	200	370	370	370
Net Weight	kg 17.0	17.0	18.0	17.0	17.0	18.0
Connecting Cable	3 + 1 (earth), ø1.5 mm²					
Refrigerant Pipe Diameter						
Liquid Side	mm 6.35	6.35	6.35	6.35	6.35	6.35
Gas Side	mm 9.52	12.70*	12.70*	9.52	12.70*	12.70*

*A pipe size reducer (CZ-MA1P) must be used to reduce the pipe diameter to 9.52 mm at the connection port of the indoor unit.

Multi Inverter Split : Outdoor Units



Cooling
Heating

Model (50Hz)	CU-2E15GBE	CU-2E18CBPG	CU-3E18EBE	CU-3E23CBPG	CU-4E27CBPG
Indoor-units Combination	2.2 kW + 2.2 kW	3.2 kW + 3.2 kW	2.2 kW + 2.8 kW + 4.0 kW	2.8 kW + 3.2 kW + 4.0 kW	3.2 kW + 3.2 kW + 3.2 kW + 4.0 kW
Power Source	Single phase, 230 V, 50 Hz (Power supply from outdoor unit)				
Cooling Operation					
Capacity	kW 4.5 (1.5 - 5.0)	5.2 (1.5 - 5.4)	5.2 (1.8 - 7.3)	6.8 (2.8 - 8.4)	8.0 (3.0 - 9.2)
Electrical Data					
Running Current	A 5.75	7.10	5.40	8.50	8.70
Power Input	W 1,230 (250 - 1,350)	1,520 (250 - 1,580)	1,220 (360 - 2,180)	1,950 (490 - 2,800)	1,980 (530 - 2,870)
EER	W/W 3.66	3.42	4.26	3.49	4.04
Noise					
Sound Pressure Level	dB(A) 47	49	46	48	48
Sound Power Level	dB 62	64	59	61	61
Heating Operation					
Capacity	kW 5.4 (1.1 - 7.0)	5.6 (1.1 - 7.2)	6.8 (1.6 - 8.3)	8.6 (3.5 - 9.1)	9.4 (4.2 - 10.6)
Electrical Data					
Running Current	A 5.20	5.35	6.30	8.30	9.10
Power Input	W 1,170 (210 - 1,670)	1,210 (210 - 1,700)	1,420 (320 - 2,110)	1,880 (560 - 2,710)	2,080 (700 - 3,060)
COP	W/W 4.62	4.63	4.79	4.57	4.52
Noise					
Sound Pressure Level	dB(A) 49	51	47	49	49
Sound Power Level	dB 64	66	60	62	62
Maximum Current	A 12.0	12.0	17.5	18.5	19.0
Starting Current	A 5.75	7.10	6.30	8.50	9.10
Compressor Output	W 1,200	1,500	1,500	1,900	2,200
Fan Output	W 40	40	50	53	51
Circuit Breaker Ratio	A 15	15	20	20	20
Dimensions					
Height	mm 540	540	735	735	908
Width	mm 780 (+70)	780 (+70)	826 (+73)	826 (+110)	900
Depth	mm 289	289	300	300	320
Net Weight	kg 38	38	49	57	73
Connecting Cable	3 + 1 (earth), ø1.5 mm²				
Pipe Length Range (1 room)	m 3 - 20	3 - 20	3 - 25	3 - 25	3 - 25
Maximum Pipe Length (Total room)***	m 30	30	50	50	70
Refrigerant Pipe Diameter					
Liquid Side	mm 6.35	6.35	6.35	6.35	6.35
Gas Side	mm 9.52	9.52	9.52	9.52	9.52
Energy Saving Classification	Cooling Class				
	Annual Energy Consumption	kW 615	760	610	975
	Heating Class				

Rating Conditions

	Cooling	Heating
Inside air temperature	27°C DB/19°C WB	20°C DB
Outside air temperature	35°C DB/24°C WB	7°C DB/6°C WB

* The cooling sound power level specification is based on EUROVENT Document 6/C/006-97.
** Additional Gas might be required for some models.
*** Refer to page 21 for information on Additional Gas.
For models with the Air Purifying Filter, the specifications indicate values with the filter removed.

Caution (Important) Please do not use copper pipes which the thickness is less than 0.8mm.

Specifications



CU-2E15GBE

		COOLING OPERATION										HEATING OPERATION					
		Cooling Capacity			Running Current	Power Input	Cooling Class	A.E.C. #	Heating Capacity			Running Current	Power Input	Heating Class			
		Room A	Room B	Total					Room A	Room B	Total						
		kW	kW	kW	A	W	kW	kW	kW	kW	A	W	kW				
1 room	2.2	2.20	—	2.20 (1.1 - 2.9)	2.45	520 (220 - 750)	A	260	3.20	—	3.20 (0.7 - 4.8)	3.75	850 (170 - 1,410)	A			
	2.8	2.80	—	2.80 (1.1 - 3.5)	3.50	750 (220 - 1,000)	A	375	4.00	—	4.00 (0.7 - 5.5)	5.10	1,150 (170 - 1,700)	B			
	3.2	3.20	—	3.20 (1.1 - 4.0)	4.30	920 (220 - 1,220)	A	460	4.50	—	4.50 (0.7 - 6.2)	5.55	1,250 (170 - 1,810)	B			
2 rooms	2.2 + 2.2	2.25	2.25	4.50 (1.5 - 5.0)	5.75	1,230 (250 - 1,350)	A	615	2.70	2.70	5.40 (1.1 - 7.0)	5.20	1,170 (210 - 1,670)	A			
	2.2 + 2.8	2.00	2.50	4.50 (1.5 - 5.2)	5.75	1,230 (250 - 1,520)	A	615	2.40	3.00	5.40 (1.1 - 7.0)	5.20	1,170 (210 - 1,670)	A			
	2.2 + 3.2	1.80	2.70	4.50 (1.5 - 5.2)	5.75	1,230 (250 - 1,520)	A	615	2.20	3.20	5.40 (1.1 - 7.0)	5.20	1,170 (210 - 1,670)	A			
	2.2 + 2.8*	2.00	2.50	4.50 (1.5 - 5.2)	6.50	1,390 (250 - 1,730)	A	695	2.40	3.00	5.40 (1.1 - 7.0)	6.05	1,360 (210 - 1,670)	A			
	2.2 + 3.2*	2.00	2.50	4.50 (1.5 - 5.2)	6.50	1,390 (250 - 1,730)	A	695	2.40	3.00	5.40 (1.1 - 7.0)	6.05	1,360 (210 - 1,670)	A			

* 2.8kW class: CS-ME10DD3EG (Hide-Away type)

CU-2E18CBPG

Indoor Units Capacity		COOLING OPERATION						HEATING OPERATION						
		Cooling Capacity			Running Current	Power Input	Cooling Class	A.E.C.*	Heating Capacity			Running Current	Power Input	Heating Class
		Room A	Room B	Total					Room A	Room B	Total			
		kW	kW	kW	A	W	kW	kW	kW	A	W	kW		
1 room	2.2	2.20	–	2.20 (1.1 - 2.9)	2.45	520 (220 - 750)	A	260	3.20	–	3.20 (0.7 - 4.8)	3.75	850 (170 - 1,410)	A
	2.8	2.80	–	2.80 (1.1 - 3.5)	3.50	750 (220 - 1,000)	A	375	4.00	–	4.00 (0.7 - 5.5)	5.10	1,150 (170 - 1,700)	B
	3.2	3.20	–	3.20 (1.1 - 4.0)	4.30	920 (220 - 1,220)	A	460	4.50	–	4.50 (0.7 - 6.2)	5.55	1,250 (170 - 1,810)	B
2 rooms	2.2 + 2.2	2.25	2.25	4.50 (1.5 - 5.0)	5.75	1,230 (250 - 1,350)	A	615	2.70	2.70	5.40 (1.1 - 7.0)	5.20	1,170 (210 - 1,670)	A
	2.2 + 2.8	2.00	2.50	4.50 (1.5 - 5.2)	5.75	1,230 (250 - 1,520)	A	615	2.40	3.00	5.40 (1.1 - 7.0)	5.20	1,170 (210 - 1,670)	A
	2.2 + 2.8*	2.00	2.50	4.50 (1.5 - 5.2)	6.50	1,390 (250 - 1,730)	A	695	2.40	3.00	5.40 (1.1 - 7.0)	6.05	1,360 (210 - 1,670)	A
	2.2 + 3.2	1.95	2.85	4.80 (1.5 - 5.3)	6.10	1,310 (250 - 1,540)	A	655	2.30	3.30	5.60 (1.1 - 7.2)	5.45	1,230 (210 - 1,720)	A
	2.8 + 2.8	2.40	2.40	4.80 (1.5 - 5.2)	6.10	1,310 (250 - 1,520)	A	655	2.80	2.80	5.60 (1.1 - 7.2)	5.55	1,250 (210 - 1,740)	A
	2.8* + 2.8*	2.40	2.40	4.80 (1.5 - 5.2)	7.25	1,560 (250 - 1,730)	B	780	2.80	2.80	5.60 (1.1 - 7.2)	6.50	1,470 (210 - 1,740)	A
	2.8 + 3.2	2.30	2.70	5.00 (1.5 - 5.3)	6.95	1,490 (250 - 1,540)	A	745	2.60	3.00	5.60 (1.1 - 7.2)	5.45	1,230 (210 - 1,720)	A
	2.8* + 3.2	2.30	2.70	5.00 (1.5 - 5.3)	7.80	1,670 (250 - 1,800)	C	835	2.60	3.00	5.60 (1.1 - 7.2)	6.15	1,390 (210 - 1,720)	A
	3.2 + 3.2	2.60	2.60	5.20 (1.5 - 5.4)	7.10	1,520 (250 - 1,580)	A	760	2.80	2.80	5.60 (1.1 - 7.2)	5.35	1,210 (210 - 1,700)	A
	3.2 + 3.2*	2.60	2.60	5.20 (1.5 - 5.4)	7.10	1,520 (250 - 1,580)	A	760	2.80	2.80	5.60 (1.1 - 7.2)	5.35	1,210 (210 - 1,700)	A

*The specifications are different from other type of indoor units when 2.8kW duct type or floor/ceiling type is connected to CU-2E18CBPG.

CU-3E18EBE

Indoor Units Capacity		COOLING OPERATION										HEATING OPERATION									
		Cooling Capacity				Running Current	Power Input	Cooling Class	A.E.C.#	Heating Capacity				Running Current	Power Input	Heating Class					
		Room A	Room B	Room C	Total					Room A	Room B	Room C	Total								
		kW	kW	kW	kW	A	W	kW	kW	kW	kW	A	W	kW							
1 room	2.2	2.20	—	—	2.20 (1.8 - 2.9)	2.50	500 (340 - 810)	A	250	3.20	—	—	3.20 (1.2 - 4.1)	3.70	740 (300 - 1,230)	A					
	2.8	2.80	—	—	2.80 (1.8 - 2.9)	3.30	700 (340 - 810)	A	350	4.00	—	—	4.00 (1.2 - 4.3)	5.00	1,050 (300 - 1,230)	A					
	3.2	3.20	—	—	3.20 (1.8 - 3.8)	3.70	800 (340 - 1,360)	A	400	4.50	—	—	4.50 (1.2 - 5.8)	5.80	1,230 (300 - 2,100)	A					
	4.0	4.00	—	—	4.00 (1.8 - 4.3)	5.60	1,240 (340 - 1,990)	A	620	5.60	—	—	5.60 (1.2 - 6.8)	7.70	1,720 (300 - 2,930)	C					
	5.0	5.00	—	—	5.00 (1.9 - 5.7)	6.80	1,550 (340 - 2,130)	A	775	6.80	—	—	6.80 (1.2 - 6.9)	9.20	2,100 (300 - 2,520)	C					
2 room	2.2 + 2.2	2.20	2.20	—	4.40 (1.9 - 6.2)	4.90	1,110 (350 - 2,100)	A	555	2.90	2.90	—	5.80 (1.4 - 7.0)	6.40	1,450 (310 - 2,550)	A					
	2.2 + 2.8	2.20	2.80	—	5.00 (1.9 - 6.2)	6.20	1,410 (350 - 2,100)	A	705	2.85	3.55	—	6.40 (1.4 - 7.0)	7.60	1,720 (310 - 2,550)	A					
	2.2 + 3.2	2.10	3.10	—	5.20 (1.9 - 6.3)	6.60	1,490 (350 - 2,110)	A	745	2.85	3.95	—	6.80 (1.4 - 7.3)	8.20	1,840 (310 - 2,520)	A					
	2.2 + 4.0	1.85	3.35	—	5.20 (1.9 - 6.4)	6.40	1,450 (350 - 2,110)	A	725	2.45	4.35	—	6.80 (1.4 - 7.3)	7.90	1,800 (310 - 2,510)	A					
	2.2 + 5.0	1.60	3.60	—	5.20 (1.9 - 6.8)	5.70	1,290 (360 - 2,150)	A	645	2.10	4.70	—	6.80 (1.4 - 8.0)	6.70	1,520 (310 - 2,200)	A					
	2.8 + 2.8	2.60	2.60	—	5.20 (1.9 - 6.2)	6.80	1,540 (350 - 2,100)	A	770	3.40	3.40	—	6.80 (1.4 - 7.0)	8.50	1,930 (310 - 2,550)	B					
	2.8 + 3.2	2.45	2.75	—	5.20 (1.9 - 6.3)	6.50	1,480 (350 - 2,110)	A	740	3.20	3.60	—	6.80 (1.4 - 7.3)	8.10	1,840 (310 - 2,520)	A					
	2.8 + 4.0	2.15	3.05	—	5.20 (1.9 - 6.4)	6.40	1,440 (350 - 2,110)	A	720	2.85	3.95	—	6.80 (1.4 - 7.3)	8.00	1,800 (310 - 2,510)	A					
	2.8 + 5.0	1.85	3.35	—	5.20 (1.9 - 6.8)	5.70	1,290 (360 - 2,150)	A	645	2.45	4.35	—	6.80 (1.4 - 8.0)	6.70	1,520 (310 - 2,200)	A					
	3.2 + 3.2	2.60	2.60	—	5.20 (1.9 - 6.4)	6.40	1,450 (350 - 2,120)	A	725	3.40	3.40	—	6.80 (1.4 - 7.5)	7.70	1,750 (310 - 2,490)	A					
3 room	3.2 + 4.0	2.30	2.90	—	5.20 (1.9 - 6.5)	6.30	1,410 (350 - 2,120)	A	705	3.05	3.75	—	6.80 (1.4 - 7.5)	7.80	1,760 (310 - 2,470)	A					
	3.2 + 5.0	2.05	3.15	—	5.20 (1.9 - 6.9)	5.50	1,250 (360 - 2,150)	A	625	2.65	4.15	—	6.80 (1.4 - 8.0)	6.60	1,500 (310 - 2,180)	A					
	4.0 + 4.0	2.60	2.60	—	5.20 (1.9 - 6.5)	6.20	1,410 (350 - 2,120)	A	705	3.40	3.40	—	6.80 (1.4 - 7.6)	7.50	1,710 (310 - 2,470)	A					
	4.0 + 5.0	2.30	2.90	—	5.20 (1.9 - 6.9)	5.50	1,250 (360 - 2,160)	A	625	3.00	3.80	—	6.80 (1.4 - 8.0)	6.60	1,500 (310 - 2,170)	A					
	2.2 + 2.2 + 2.2	1.73	1.73	1.73	5.20 (1.9 - 7.2)	5.40	1,240 (360 - 2,170)	A	620	2.26	2.26	2.26	6.78 (1.5 - 8.1)	6.70	1,530 (320 - 2,120)	A					
	2.2 + 2.2 + 2.8	1.59	1.59	2.02	5.20 (1.9 - 7.2)	5.40	1,240 (360 - 2,170)	A	620	2.10	2.10	2.60	6.80 (1.5 - 8.1)	6.70	1,530 (320 - 2,120)	A					
	2.2 + 2.2 + 3.2	1.51	1.51	2.19	5.20 (1.9 - 7.2)	5.40	1,230 (360 - 2,180)	A	615	2.00	2.00	2.80	6.80 (1.4 - 8.3)	6.50	1,490 (320 - 2,110)	A					
	2.2 + 2.2 + 4.0	1.36	1.36	2.48	5.20 (1.8 - 7.3)	5.40	1,230 (360 - 2,180)	A	615	1.80	1.80	3.20	6.80 (1.6 - 8.3)	6.40	1,460 (320 - 2,110)	A					
	2.2 + 2.8 + 2.8	1.47	1.87	1.87	5.20 (1.9 - 7.2)	5.40	1,240 (360 - 2,170)	A	620	1.95	2.45	2.45	6.80 (1.5 - 8.1)	6.70	1,530 (320 - 2,120)	A					
	2.2 + 2.8 + 3.2	1.40	1.78	2.03	5.20 (1.9 - 7.2)	5.40	1,230 (360 - 2,180)	A	615	1.85	2.30	2.60	6.80 (1.4 - 8.3)	6.50	1,490 (320 - 2,110)	A					

CU-3E23CBPG

Indoor Units Capacity		COOLING OPERATION							HEATING OPERATION							
		Cooling Capacity			Running Current	Power Input	Cooling Class	A.E.C.#	Heating Capacity			Running Current	Power Input	Heating Class		
		Room A	Room B	Room C					Total	Room A	Room B				Room C	
		kW	kW	kW	kW	A	W		kW	kW	kW	kW	A	W		
1 room	2.2	2.20	—	—	2.20 (1.9 - 2.7)	2.25	450 (380 - 620)	A	225	3.20	—	—	3.20 (1.7 - 4.1)	3.85	840 (370 - 1,310)	A
	2.8	2.80	—	—	2.80 (2.0 - 3.4)	2.95	620 (380 - 900)	A	310	4.00	—	—	4.00 (1.7 - 4.3)	5.40	1,210 (370 - 1,400)	C
	3.2	3.20	—	—	3.20 (2.0 - 3.9)	3.40	720 (380 - 1,090)	A	360	4.50	—	—	4.50 (1.7 - 5.7)	5.85	1,310 (370 - 1,910)	B
	4.0	4.00	—	—	4.00 (2.0 - 4.4)	4.60	1,030 (380 - 1,390)	A	515	5.60	—	—	5.60 (1.8 - 7.2)	8.35	1,900 (370 - 2,920)	D
	5.0	5.00	—	—	5.00 (2.1 - 5.2)	7.15	1,610 (400 - 1,800)	B	805	7.10	—	—	7.10 (2.1 - 7.3)	12.4	2,840 (430 - 2,890)	F
2 room	2.2 + 2.2	2.20	2.20	—	4.40 (2.1 - 5.0)	4.45	980 (400 - 1,260)	A	490	3.15	3.15	—	6.30 (1.8 - 8.6)	6.25	1,410 (400 - 2,570)	A
	2.2 + 2.8	2.20	2.80	—	5.00 (2.1 - 6.1)	5.50	1,230 (400 - 1,880)	A	615	3.10	4.00	—	7.10 (2.1 - 8.6)	7.55	1,700 (420 - 2,570)	A
	2.2 + 3.2	2.20	3.20	—	5.40 (2.2 - 7.0)	6.10	1,370 (400 - 2,790)	A	685	3.05	4.45	—	7.50 (2.2 - 8.7)	7.75	1,740 (420 - 2,970)	A
	2.2 + 4.0	2.20	4.00	—	6.20 (2.2 - 7.1)	8.00	1,820 (400 - 2,790)	A	910	2.90	5.30	—	8.20 (2.4 - 8.7)	8.85	2,010 (440 - 2,970)	A
	2.2 + 5.0	2.10	4.70	—	6.80 (2.5 - 7.1)	9.85	2,240 (460 - 2,800)	B	1,120	2.65	5.95	—	8.60 (3.2 - 9.0)	9.50	2,160 (530 - 2,960)	A
	2.8 + 2.8	2.80	2.80	—	5.60 (2.2 - 6.9)	6.85	1,550 (400 - 2,780)	A	775	3.85	3.85	—	7.70 (2.3 - 8.7)	8.45	1,930 (440 - 3,040)	A
	2.8 + 3.2	2.80	3.20	—	6.00 (2.2 - 7.0)	7.55	1,700 (400 - 2,790)	A	850	3.70	4.30	—	8.00 (2.4 - 8.8)	8.60	1,970 (440 - 3,020)	A
	2.8 + 4.0	2.80	4.00	—	6.80 (2.2 - 7.1)	10.5	2,390 (400 - 2,790)	C	1,195	3.55	5.05	—	8.60 (2.1 - 9.0)	9.55	2,175 (530 - 3,030)	A
	2.8 + 5.0	2.45	4.35	—	6.80 (2.5 - 7.2)	9.85	2,230 (460 - 2,800)	B	1,115	3.10	5.50	—	8.60 (3.2 - 9.0)	9.50	2,150 (530 - 3,010)	A
	3.2 + 3.2	3.20	3.20	—	6.40 (2.2 - 7.3)	8.15	1,860 (400 - 2,810)	A	930	4.20	4.20	—	8.40 (2.5 - 9.0)	9.05	2,050 (470 - 2,970)	A
	3.2 + 4.0	3.00	3.80	—	6.80 (2.5 - 7.3)	9.65	2,200 (460 - 2,810)	B	1,100	3.80	4.80	—	8.60 (3.2 - 9.0)	9.20	2,090 (530 - 2,970)	A
	3.2 + 5.0	2.65	4.15	—	6.80 (2.6 - 7.4)	9.30	2,120 (460 - 2,820)	A	1,060	3.35	5.25	—	8.60 (3.2 - 9.0)	9.15	2,080 (530 - 2,950)	A
	4.0 + 4.0	3.40	3.40	—	6.80 (2.5 - 7.3)	9.65	2,190 (460 - 2,810)	B	1,095	4.30	4.30	—	8.60 (3.2 - 9.0)	9.15	2,080 (530 - 2,970)	A
	4.0 + 5.0	3.10	3.80	—	6.80 (2.7 - 7.4)	9.30	2,110 (460 - 2,820)	A	1,055	3.80	4.80	—	8.60 (3.2 - 9.1)	9.15	2,070 (530 - 2,950)	A
	4.0 + 5.0	3.40	3.40	—	6.80 (2.6 - 7.4)	9.15	2,070 (460 - 2,820)	A	1,035	4.50	4.30	—	8.60 (3.5 - 9.1)	9.15	2,070 (530 - 2,940)	A
3 room	2.2 + 2.2 + 2.2	2.20	2.20	2.20	6.60 (2.2 - 7.7)	8.10	1,850 (410 - 2,450)	A	925	2.98	2.98	2.98	8.58 (3.1 - 8.9)	8.50	1,940 (500 - 2,800)	A
	2.2 + 2.2 + 2.8	2.10	2.10	2.60	6.80 (2.5 - 8.1)	8.70	1,980 (460 - 2,820)	A	900	2.65	2.65	3.30	8.60 (3.2 - 8.9)	8.70	1,980 (510 - 2,800)	A
	2.2 + 2.2 + 3.2	1.95	1.95	2.90	6.80 (2.5 - 8.1)	8.80	1,990 (460 - 2,790)	A	995	2.50	2.50	3.60	8.60 (3.2 - 9.0)	8.60	1,960 (510 - 2,780)	A
	2.2 + 2.2 + 4.0	1.80	1.80	3.20	6.80 (2.6 - 8.2)	8.60	1,970 (460 - 2,790)	A	985	2.25	2.25	4.10	8.60 (3.2 - 8.8)	8.50	1,940 (510 - 2,760)	A
	2.2 + 2.2 + 5.0	1.60	1.60	3.60	6.80 (2.8 - 8.3)	8.60	1,960 (490 - 2,790)	A	980	2.00	2.00	4.60	8.60 (3.2 - 8.8)	8.45	1,920 (510 - 2,760)	A
	2.2 + 2.8 + 2.8	1.90	2.45	2.45	6.80 (2.5 - 8.1)	8.50	1,950 (460 - 2,790)	A	975	2.40	3.10	3.10	8.60 (3.2 - 9.0)	8.45	1,930 (510 - 2,730)	A
	2.2 + 2.8 + 3.2	1.80	2.35	2.65	6.80 (2.6 - 8.1)	8.70	1,980 (460 - 2,790)	A	990	2.30	2.95	3.35	8.60 (3.2 - 8.8)	8.45	1,930 (510 - 2,760)	A
	2.2 + 2.8 + 4.0	1.65	2.15	3.00	6.80 (2.7 - 8.2)	8.60	1,960 (490 - 2,790)	A	980	2.10	2.70	3.80	8.60 (3.2 - 9.0)	8.35	1,910 (510 - 2,760)	A
	2.2 + 2.8 + 5.0	1.50	1.90	3.40	6.80 (2.8 - 8.3)	8.50	1,950 (490 - 2,790)	A	975	1.90	2.40	4.30	8.60 (3.5 - 9.0)	8.45	1,920 (560 - 2,730)	A
	2.2 + 3.2 + 3.2	1.70	2.55	2.55	6.80 (2.7 - 8.3)	8.60	1,970 (460 - 2,800)	A	985	2.20	3.20	3.20	8.60 (3.2 - 9.1)	8.35	1,910 (500 - 2,710)	A
	2.2 + 3.2 + 4.0	1.60	2.30	2.90	6.80 (2.8 - 8.3)	8.50	1,950 (490 - 2,800)	A	975	2.00	2.95	3.65	8.60 (3.2 - 9.0)	8.25	1,890 (500 - 2,710)	A
	2.8 + 2.8 + 2.8	2.26	2.26	2.26	6.78 (2.6 - 8.1)	8.50	1,940 (460 - 2,820)	A	970	2.86	2.86	2.86	8.58 (3.2 - 9.0)	8.35	1,910 (510 - 2,760)	A
	2.8 + 2.8 + 3.2	2.15	2.15	2.50	6.80 (2.7 - 8.2)	8.60	1,960 (490 - 2,790)	A	980	2.75	2.75	3.10	8.60 (3.2 - 8.4)	8.45	1,920 (510 - 2,760)	A
	2.8 + 2.8 + 4.0	2.00	2.00	2.80	6.80 (2.8 - 8.2)	8.50	1,950 (490 - 2,790)	A	975	2.50	2.50	3.60	8.60 (3.3 - 9.0)	8.35	1,900 (530 - 2,760)	A
	2.8 + 3.2 + 3.2	2.10	2.35	2.35	6.80 (2.7 - 8.3)	8.60	1,960 (490 - 2,800)	A	980	2.60	3.00	3.00	8.60 (3.2 - 9.0)	8.35	1,900 (500 - 2,710)	A
2.8 + 3.2 + 4.0	1.90	2.20	2.70	6.80 (2.8 - 8.4)	8.50	1,950 (490 - 2,800)	A	975	2.40	2.75	3.45	8.60 (3.5 - 9.1)	8.30	1,880 (560 - 2,710)	A	
3.2 + 3.2 + 3.2	2.26	2.26	2.26	6.78 (2.8 - 8.5)	8.60	1,960 (490 - 2,800)	A	980	2.86	2.86	2.86	8.58 (3.3 - 9.1)	8.10	1,850 (520 - 2,670)	A	

Feature Comparison

Heat Pump Models Cooling Models			Single Inverter Split								Multi Inverter Split						Single Split				
			Wall-Mounted					Floor or Ceiling	Cassette (4-way)		Hide-Away	Wall-Mounted		Floor or Ceiling	Cassette (1-way)	Cassette (4-way)	Hide-Away	Wall-Mounted			Floor or Ceiling
			CS-HE9GKE CS-HE12GKE	CS-NE7GKE CS-NE9GKE CS-NE12GKE	CS-CE7GKEW CS-CE9GKEW CS-CE12GKEW	CS-E15EKEA CS-E18EKEA CS-E21EKEA	CS-TE9DKE CS-TE12DKE	CS-E15DTEW CS-E18DTEW CS-E21DTE5	CS-E15DB4EW CS-E18DB4EW CS-E21DB4E5		CS-E15DD3EW CS-E18DD3EW	CS-CE7GKEW CS-CE9GKEW CS-CE12GKEW CS-E15GKEW	CS-E18GKEW	CS-ME10DTEG CS-E15DTEW CS-E18DTEW	CS-ME7EB1E CS-ME10EB1E CS-ME12EB1E CS-ME14EB1E	CS-E15DB4EW CS-E18DB4EW	CS-ME10DD3EG CS-E15DD3EW CS-E18DD3EW	CS-V7DKE CS-V9DKE CS-V12DKE	CS-V18DKE CS-V24DKE	CS-V28EKE	CS-V12CTP CS-V18CTP CS-V24CTP
																					
Healthy Air Quality		e-ion Air Purifying System			●						●	●									
		Patrol Sensor			●						●	●									
		Ion Freshener				●	●									●	●	●			
		Supersonic Air Purifying System				●										●	●	●			
		SUPER alleru-buster filter	●	●		●	●	(Option)	(Option)			(Option)		(Option)		●	●	●			
		Anti-Mould, One-Touch Air Filter	●	●		●	●	●	●			●	●	●		●	●	●	●	●	
		Odour-Removing Function	●	●	●	●	●	●	●	●		●	●	●	●	●	●	●	●	●	
		Removable, Washable Panel	●	●	●	●	●		●			●	●		●	●	●	●			
Comfortable		Inverter Control	●	●	●	●	●	●		●	●	●	●	●	●	●					
		Heating Possible at -20°C	●	●	**																
		+8°C/+10°C Low-Temperature Heating		●																	
		Quiet Mode	●	●	●	●	●	●		●	●	●	●	●	●	●	●	●	●		
		Powerful Mode	●	●	●	●	●	●		●	●	●	●	●	●	●	●	●	●		
		-15°C Low Ambient Cooling		●		●															
		Soft Dry Operation Mode	●	●	●	●	●	●		●	●	●	●	●	●	●	●	●	●	●	
		Wide & Long Airflow Vane		●	●		●				●										
		Personal Airflow Creation	●			●						●						●	●		
		Airflow Direction Control (Up & Down)		●	●		●	●			●		●	●	●		●			●	
		Manual Horizontal Airflow Direction Control		●	●		●	●			●		●								
		Sleep Mode																		●	
		Auto Changeover (Inverter)	●	●	●	●	●	●		●	●	●	●	●	●	●					
		Automatic Operation Mode (Cooling)															●	●	●	●	
		Hot Start Control	●	●	●	●	●	●		●	●	●	●	●	●	●					
		Circulation Operation Mode															●	●	●	●	
Convenient		24-Hour ON&OFF Real Setting Timer	●	●	●	●	●	●		●	●	●	●	●	●	●	●	●	●		
		12-Hour ON&OFF Timer																		●	
		LCD Wireless Remote Controller	●	●	●	●	●	●		●	●	●	●	●	●	●	●	●	●	●	
		Bilingual Sticker	●	●	●	●	●	●		●	●	●	●	●	●	●	●	●	●	●	
Reliable		Random Auto Restart	●	●	●	●	●	●		●	●	●	●	●	●	●	●	●	●	●	
		Long Piping	15m	15m	15m	15m(E15) 20m(E18/E21)	15m	20m	20m	20m	30m/20m*(2E15/18) 50m/25m*(3E18/23) 70m/25m*(4E27)	30m/20m*(2E15/18) 50m/25m*(3E18/23) 70m/25m*(4E27)	30m/20m*(2E15/18) 50m/25m*(3E18/23) 70m/25m*(4E27)	50m/25m*(3E18/23) 70m/25m*(4E27)	50m/25m*(3E18/23) 70m/25m*(4E27)	30m/20m*(2E15/18) 50m/25m*(3E23) 70m/25m*(4E27)	10m(V7/V9) 15m(V12)	25m	30m	15m(V12) 25m(V18/V24)	
		Top-Panel Maintenance Access	●	●	●	●	●	●		●	●	●	●	●	●	●	●	●	●	●	
		Self-Diagnostic Function	●	●	●	●	●	●		●	●	●	●	●	●	●					

* Total room / One room
** -10°C Possible